

SMARTdrive - Frequenz-Inverter 0.4kW - 11kW





SMARTdrive

0.4 kW - 11 kW

FREQUENCY INVERTER

HIGHLIGHTS

High-tech motor control concept, based on advanced DSP- technology V/Hz, SENSORLESS VECTOR with SPEED/TORQUE control, sensorless PMM synchronous motor control.

Intelligent AUTOTUNING functions for easy set-up

Rugged construction, all metal enclosure, thermally decoupled from motor, IP67/NEMA 4, shock proof(4G) - for motor- and wall mounting

Flexible configurable 4 line character LCD display

ready for all common field bus systems

Numerous standard inverter functions, to make it suitable for all kind of industrial and civil applications, and for retrofit as well- integrated PID controller

C3 class EMC filter build in, optional kit for internal C1 class filter available

Smart PC-tools, for inverter control, parametrization and troubleshooting. parameter-COPY- stick


Approved for worldwide standards by independent bodies



MOTOR MOUNTING ADAPTER FOR ALL KIND OF MOTORS AVAILABLE



OPTIONAL BUILD - IN C1 CLASS EMC FILTER

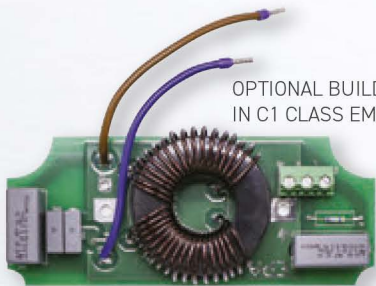

FRAMESIZE


Model	Motor power (KW)	Framesize	Dimensions (WxHxD-mm)	Remarks
SMARTdrive-0004 S2	0,4 kW - 2,5 A			
SMARTdrive-0007 S2	0,75 kW - 4,5 A			
SMARTdrive-0015 S2	1,5 kW - 7 A			1-phase 220V
SMARTdrive-0022 S2	2,2 kW - 10 A			
SMARTdrive-0004 T2	0,4 kW - 2,5 A			
SMARTdrive-0007 T2	0,75 kW - 4,5 A			
SMARTdrive-0015 T2	1,5 kW - 7 A	J1	186x266x180	3-phase 220V
SMARTdrive-0022 T2	2,2 kW - 10 A			
SMARTdrive-0007 T3	0,75 kW - 2A			
SMARTdrive-0015 T3	1,5 kW - 4A			
SMARTdrive-0022 T3	2,2 kW - 6,5A			
SMARTdrive-0030 T3	3,0 kW - 7 A			3-phase 380V
SMARTdrive-0040 T3	4,0 kW - 9 A			
SMARTdrive-0055 T3	5,5 kW - 12 A			
SMARTdrive-0075 T3	7,5 kW - 17 A	J2	215x325x190	
SMARTdrive-0110 T3	11 kW - 23 A			



THERMALLY DECOUPLED FROM MOTOR - all heat generating power components located in the easy removable cover



4 line LCD character KEYPAD to rotate in 90° steps



OPTIONAL WALL MOUNT KIT

IP66 LCD REMOTE KEYPAD



PARAMETER COPY STICK



IP66 ACCESSORIES



TECHNICAL DATA

Power input	Rated input voltage	3-Phase 380V-460V (+/-15%) 1-Phase 220V ~ 240V (±15%) 3-Phase 220V ~ 240V (±15%)
	Input frequency	44...67 Hz
	EMC	Integrated C3 filter (industrial area), integrated C1 class filter optional
Motor output	Output voltage	0.....V-input
	Output frequency	0.....650 Hz
	Frequency resolution	0,01 Hz
	Overload capability	150% - 60 sec. / 10 min
Control Mode	Motor control algorithm	V/Hz-SpaceVector, SLV-SENSORLESS VECTOR with torque/speed control mode, CLV-Closed loop vector, Permanent Magnet Synchronous Motor PMSM SENSORLESS control
	Chopper frequency	0.8...16 kHz (fixed / random pattern)
	V/Hz curve	Linear, exponential, and user-programmable curve
	Starting torque	150% rated torque at 0,5 Hz (in SLV Mode)
	Torque compensation	Automatic / Manual
	Motor data input	Manual, from nameplate / AUTOTUNING
	Control range	1:100 in SLV mode, 1:1000 in CLV mode, 1:20 in PMSM mode
	Speed precision	+/- 0,5% (SLV), +/- 0.02% (CLV)
	Torque precision	+/- 5% (SLV)
	DC-Brake	User programmable functions
	Brake chopper	Chopper transistor integrated
Display	4 Line LCD Character	Programmable to display parameters and parameter values, inverter status and operating parameters
I/O Hardware	Analogue inputs	2 analogue inputs - 12 BIT: 0...10V, 0...5V, 0...(4)20 mA, all free scalable in gain and offset, and mathematically concatenable
	Analogue outputs	2 analogue outputs, programmable in gain and function (0...10V, 0(4)...20 mA)
	Digital outputs	2 relays with switchover contacts 5A 230V capability 1 OC digital output (24V 100 mA)
	Data link	Serial link RS 485 (MODBUS ASCII/RTU)
Special functions	Special functions	24V / 200 mA auxiliary power supply on terminals, 10V potentiometer power supply, 5V/100 mA power supply on modbus connector PTC / KLIXON motor protection
Electronic protections with fault history	Electrical	Over-voltage, under-voltage Over-current, overload, motor-overload, output short-circuit Input phaseloss, motor phase unbalance
	Thermal	Heatsink overtemperature, I ² t motorprotection Motor PTC
Options	Display	IP66 Remotable display / keypad units
	Brake chopper	Braking resistors for different load characteristics
	PC-software	Configuration-, control- an diagnosis-tool, parameter copy/duplicating stick
	Parameter copy stick	
Environmental and operating conditions	Protection class	IP66 / NEMA4 - motor- /wall mounting
	Operating temperature	-10.....+40 °C – -40°C with automatic antifreeze control function (option)
	Humidity	0 to 98%, non-corrosive
	Altitude	1000 m, above 1% derating / 100m
Standards	EMC	EN61800-3(2004)
	Safety	EN61800-5-1 2003